


KNOW BEFORE YOU GO™

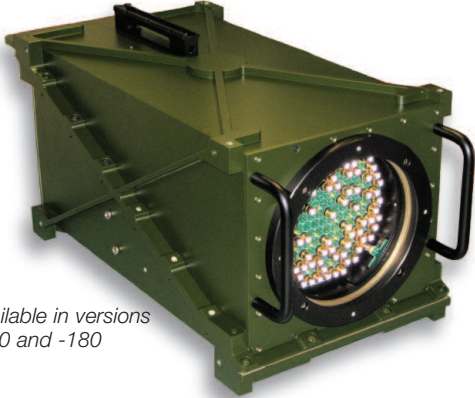

Available in versions
-100 and -180

UV LED Mallina Missile Warning Stimulator

Part Number: EU02153-01-FG

Specifications subject to change without notice.

Specifications

- Performance:**
- Effective range to warn 500-5,000 m
 - Beam divergence greater than or equal to 4.5 degrees (half power)
 - Sample rate up to 6 kilohertz (kHz)
 - Beam wavelengths 265-290 nanometers (nm)
 - Maximum on-axis radiance 1-3.8 watts per steradian (265-285 nm) depending on options
 - Output response time less than 100 microseconds rise time between any values
- Controls:**
- Battery/off/external selection switch
 - Input voltage selection switch
 - Initiate/abort stimulation sequence (fire) switch
 - File scroll buttons
 - Arm/safety switch
- Indicators :**
- Two-segment status and program display
 - Power, UV LED status, ready and running indicator LEDs
- Built-in tests:**
- LED integrity, power supply, battery, witness sensor, removable memory media present and checksum, display and indicators, temperature and safety key
- Test profiles:**
- Programmable using the optional Mallina Communications Suite, or MALCOM II, software package
 - Maximum 99 files per removable PCMCIA (PC) card for customer programming
 - Maximum 32-second profile duration
 - Sample rates from 200 hertz (Hz) to 6 kHz can be selected in 200-Hz steps
 - Two seconds between re-triggers (interval between firing)
- Connections:**
- Remote ports include Recommended Standard, or RS, 232/422 serial communication port/remote trigger; test file selection; initiate test; file download; and built-in test, including source status
 - Cluster network link port enables users to link up to four modules (including infrared, laser and data/video recorder)
 - Monitor port includes a witness sensor, accurate synch pulse and safety key
 - 20-60 V port with DC supply input and DC supply auxiliary output of 48 V
 - 10-32 V port with DC supply input and DC supply auxiliary output between 5-12 V
- Aiming sight:**
- One times, or x1, using an optical red dot sight or compatible with stabilized platforms
 - Optional video and infrared targeting and recording
- Construction:**
- Single optical head assembly, mounted on platform or tripod
 - Internal battery and optional external power supply modules
- Power options:**
- Supplied internal, MIL SPEC nickel-metal hydride battery, plus spare
 - Option 1: 110/230 volts alternating current, or VAC, Mallina Power Supply Unit
 - Option 2: 48 volts direct current (VDC) battery power supply unit
 - Will accept user-provided power from appropriate 10-60 VDC supply
- Dimensions:**
- Overall dimensions within 250 millimeters (mm) x 250 mm x 500 mm (0.8 ft. x 0.8 ft. x 1.6 ft.)
 - Mass less than 15 kilograms (less than 33 pounds)
- Environment:**
- Operating temperature -40 to 55 degrees Celsius (°C); -20°C for battery operation
 - Storage temperature -40 to 71°C
 - CE marked
 - Designed in accordance with MIL 28800 PRF and DEF STAN 66-31

Providing confidence and reliability through total spectrum test and training solutions.

The Ultraviolet (UV) Light-Emitting Diode (LED) Mallina is a medium- to long-range electro-optical (EO) system designed to stimulate UV missile warning systems such as AN/AAR-47, -54, -57 and -60. A ruggedized, military-specification (MIL SPEC) system, the UV LED Mallina can be used as an independent or remotely controlled EO range simulator or as an adjunct to an existing radio frequency threat simulator platform. It can be operated from typical standoff ranges of 500-5,000 meters (m) or 1,640-16,400 feet (ft.).

The UV LED Mallina is a developmental and operational test and evaluation tool, as well as a training aid for aircraft survivability equipment air crew training. It can be operated remotely using a communication serial data bus or mounted on a tripod. It also is sufficiently rugged for vehicle mounting and operation.

New LED technology allows air crews to train at night with or without night vision goggles, without fear of eye dazzle and without giving away threat locations. It also provides nearly instantaneous modulation of any depth for advanced hostile fire and missile plume simulation. In addition, the UV LED Mallina can use its internal battery source or accept other direct current (DC) sources from 10-60 volts (V).

For information within the United States, please contact:

AAI Corporation
124 Industry Lane
Hunt Valley, MD 21030
800-655-2616
EO_IR@aaicorp.com

For information outside the United States, please contact:

ESL Defence Limited
16-17 Compass Point, Ensign Way
Hamble, Southampton Hampshire
SO31 4RA
+(44) 2380455110
sales@esldefence.co.uk